ENABLE-IT ETHERNET EXTENSION EXPERTS™

Enable-IT 860 Pro Rev B
Professional Grade Ethernet Extender
User Manual

ENABLE-IT™

All Rights Reserved ©1997 - 2013 ENABLE-IT™ - Proprietary and Confidential

Copyright © 1997-2013 Enable-IT, Inc. All rights reserved. No part of this documentation may be reproduced in any form, or by any means, or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from Enable-IT, Inc.

Enable-IT, Inc. reserves the right to revise this documentation and to make changes in content from time to time without obligation on the part of Enable-IT, Inc., to provide notification of such revision or change.

Enable-IT, Inc. provides this documentation without warranty, term, or condition of any kind, either implied or expressed, including, but not limited to, the implied warranties, terms or conditions of merchantability, satisfactory quality, and fitness for a particular purpose. Enable-IT, Inc. may make improvements or changes in the product(s) and/or the program(s) described in this documentation at any time.

If there is any software on removable media described in this documentation it can be provided on request. Please contact Enable-IT, Inc. and a copy will be provided to you.

UNITED STATES GOVERNMENT LEGEND

If you are a United States government agency, then this documentation and the software described herein are provided to you subject to the following:

All technical data and computer software are commercial in nature and developed solely at private expense. Software is delivered as "Commercial Computer Software" as defined in DFARS 252.227-7014 (June 1995) or as a "commercial item" as defined in FAR 2.101 (a) and as such is provided with only such rights as are provided in Enable-IT, Inc.'s standard commercial license for the software/firmware.

Technical data is provided with limited rights only as provided in DFAR 252.227-7015 (Nov 1995) or FAR 52.227-14 (June 1987), whichever is applicable. You agree not to remove or deface any portion of any legend provided on any licensed program or documentation contained in, or delivered to you in conjunction with, this User Manual.

Unless otherwise indicated, Enable-IT, Inc. registered trademarks are registered in the United States and may, or may not, be registered in other countries

TABLE OF CONTENTS

ABOUT THIS USER MANUAL 4

INTRODUCING THE 860 PRO ETHERNET EXTENDER KIT 5
About The 860 Pro Ethernet Extender Kit 5
Key Benefits 6
Summary Of Features 6
Typical Use Applications 7

INSTALLING THE 860 PRO ETHERNET EXTENDER KIT 8
Site Plan – Installation Design Considerations 8
Unpacking The Enable-IT 860 Pro Ethernet Extender Kit 9
Perform An Out Of The Box Test (OOTBT) 9
Performing The On-Site Installation 10
Mounting The 860 Pro Ethernet Extender Units 10
Building The 860 Pro Interlink Wiring 10
Cabling Devices To The Enable-IT 860 Pro Extended Ethernet Kit 10
Troubleshooting 11
Performance Settings (DIP Switch) 11

TECHNICAL SUPPORT 13
Online Technical Services 13
World Wide Web Site 13
Returning Products for Warranty Repair 13
Returning Products for Refund 13

ENABLE-IT, INC. LIMITED WARRANTY 14

CONTACT US 16

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

ABOUT THIS USER MANUAL

This product User Manual provides all the information needed to install and use the Enable-IT 860 Pro Ethernet Extender Kit. This User Manual is intended for use by technicians who are responsible for installing and setting up network equipment. Consequently, it is assumed that the installer has a basic working knowledge of LANs (Local Area Networks), PoE (Power-over-Ethernet) and voice telecom wiring.

Most Enable-IT documents are available in Adobe Acrobat Reader Portable Document Format (PDF) or HTML on the Enable-IT's website under the Support tab.

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

INTRODUCING THE 860 PRO ETHERNET EXTENDER KIT

Congratulations on purchasing Enable-IT's 860 Pro Ethernet Extender Kit — the simplest method to stretch your broadband solutions for in-building deployment in commercial office buildings, hotels, and multi-tenant residential units.

The 860 Pro extended Ethernet product offers the lowest cost solution in a simple design for rapid install using existing 1-pair Telco wiring.

This chapter contains introductory information about the 860 Pro Ethernet Extender Kit and how it can be used in your network. It covers the following topics:

- About the 860 Pro Extended Ethernet Kit
- Key Benefits
- Summary of Features
- Typical Applications

About The 860 Pro Ethernet Extender Kit

The 860 Pro extended Ethernet solution addresses the problem of high costs associated with stretching your backbone with traditional fiber or a series of hubs/repeaters.

In many office buildings, preferred network access is a dedicated Ethernet line, however, Ethernet over twisted pair wiring has a distance limitation of 328ft. In order to drive Ethernet signal further, one would have to add repeaters to each segment of 328ft twisted pair cabling; this is often insufficient and too costly in multi-story buildings. Fortunately, the Enable-IT 860 Pro Series extended Ethernet solutions can push the reach of Ethernet to more than (19) nineteen times the typical Ethernet distance over a 1-pair Telco wiring infrastructure or better.

A simple design methodology would be to think of the 860 Pro extending a standard Ethernet line up to 6,000ft (1,829m) with a 4-Port 10/100 Ethernet switch, and can also include dual voice lines simultaneously.

To increase the durability and extended use of the product providing maximum future technology protection, the 860 Pro Ethernet Extender Kit meets the challenge of modern switched LANs, and allows you to add features and capacity as your network expands. The Enable-IT 860 Pro extended Ethernet solution has been tested to provide Full-Duplex transport up to 90Mbps over CAT2, and up to 100Mbps over CAT5e cabling.

Unit Model	Wiring	LAN Data Rate	Max. Distance
860 Pro	1-pair CAT2, up to CAT7	100Mbps FD	6,000ft (1,829m)

Up to 700ft (213m) - 100Mbps
700ft (213m) to 1,350ft (411m) - 100Mbps
1,350ft (411m) to 1,970ft (600m) - 80Mbps
1,970ft (600m) to 2,625ft (800m) - 60Mbps
2,625ft (800m) to 3,280ft (1000m) - 42Mbps
3,300ft (1006m) to 6,000(1,829m) - 30Mbps

* Actual data rate will vary on the quality of the copper in the wire, twisted vs. straight pair and environmental electromagnetic interference factors.

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

Key Benefits

The following list identifies the 860 Pro Ethernet Extender Kit key benefits.

- Dramatic cost reduction over any competing technology and includes a 4-Port 10/100 LAN switch on each end. Rapid installation with small box profile, no programming and no firmware to upgrade
- Broadband technology that delivers in-building Ethernet access over 1-pair of existing Category 2, up to Category 5e, 6 or 7, wiring at a maximum distance of 6,000ft (1,829m). Existing spare or actively in use for analog wiring can be used as well. This means no new wiring is required.
- Provides one scalable infrastructure for Internet access, POTS, VoIP, video, and virtual private networking (VPN).
- Low profile box capable of supporting dual POTS lines and Ethernet data all in a single RJ-45 Ethernet jack (Interlink port). At time of ordering, or afterwards, a RJ-45 dongle can be requested to use on RJ-11 telephone wiring.
- Quad switched RJ-45 10/100 LAN Ethernet ports for expansion without adding a hub or switch on each end.

Summary Of Features

The Enable-IT 860 Pro Ethernet Extender Kit has the following hardware features:

- Extended Ethernet line over existing CAT2 up to CAT5e / CAT7 wiring
- Uses RJ-45 Interlink port for transport (dual voice, 100Mbps data and PoE)
- Rapid Telco style installation – no programming required
- Supports digital VoD channels and maintains existing telephone (lifeline POTS)
- Drives Ethernet 100Mbps Full-Duplex service delivery with quad LAN switch, dual voice up to 6,000ft (1,829m) - can also transport PoE up to 2,500ft natively.
- Network equipment independence – transparent to protocols/applications/MAC

Specifications:
Power Indicator
100Mbps Link Status/Activity
VDSL2 Link Status/Activity

Functionality:
Data Rates 10/100Mbps Full-Duplex
Full-Duplex/Half-Duplex Status/Collisions
Protocol independent

Physical Dimensions:
Height: 1.5" (38.1mm)
Depth: 3.5" (88.9mm)
Width: 4.26" (108.2mm)
Weight: .4lbs (6.4oz) 2.5lbs

860 Pro Interlink port:
Pins 1 & 2 – Voice line 1 and Ethernet data
Pins 3 & 6 – Voice line 2 (optional)
Pins 4 & 5 – optional support for PoE
Pins 7 & 8 – optional support for PoE

Environment:
Operating temp: -49°F to 168°F (-45°C to 76°C)
Storage temp: -49°F to 168°F (-45°C to 76°C)
Humidity 5% to 95%, non-condensing

Interfaces:
(1) 5v 2A DC Power Adapter 2.1mm
(4) RJ-45 100Mbps LAN Auto negotiate
(1) RJ-45 Interlink port
(1) Phoenix Connector for PoE Input

Optional Dongle:

RJ-45 Male Head:	Pins 1 & 2 – Voice line 1 and data
	Pins 3 & 6 – Voice line 2 and data
RJ-11 Sockets:	Pins 2 & 3 – VDLS2 & Phone port – Voice line 1 and data
	Pins 1 & 4 – Voice line 2

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

Typical Use Applications

The Enable-IT, Inc. 860 Pro extended Ethernet units are usually installed into telephone wiring infrastructures where extension of backbone services is required and expensive fiber options are prohibitive. The 860 Pro Ethernet Extender Kit allows a standard Ethernet segment to be deployed quickly over existing 1-pair Telco copper wiring in combination with existing POTS voice signals. The 860 Pro Interlink port (RJ-45 interface) carries this 1-pair signaling over the RJ-45 pins 1 & 2 - used as transport for both voice and data. If you use more than 1-pair of wiring, such as a CAT5 segment, the RJ-45 (pins 3 & 4) are used for voice line 2, and the remaining pins (4,5,7 & 8) can transport native 802.3af PoE, or are unused. Quad switched RJ-45 10/100 auto-sensing ports allow the use of LAN devices without adding an Ethernet hub or switch to either end. An optional RJ-45 dongle can be used in unison with the RJ-45 Interlink wiring as DSL filters to clean up noise bleeding over your cabling, as well as combined use for RJ-11 Telephone connections.

Installers have the convenience of a 100Mbps LAN Ethernet unit for peace of mind connectivity and no device maintenance. Rapid installation allows for minimal interruption, and the Broadband technology allows for investment protection up to 10 -15 years with no firmware or replacement issues. Bandwidth can be scaled according to the Broadband access provider needs. The 860 Pro extended Ethernet unit is a passive device so interruption of Internet service does not affect POTS services. Carriers and access providers can come and go, but the 860 Pro extended Ethernet technologies continue to provide lasting value, such as other utilities like water, gas and electricity.

The Enable-IT 860 Pro Ethernet Extender Kit is suited for the following key environments:

- Commercial Buildings (Multi-Tenant Units)
- Business Parks (Multi-Tenant Units)
- Apartments (Multi-Residential Units)
- Hotels (Multi-Hospitality Units)
- Business Suites (Multi-Hospitality Units)
- School Campuses (University, K-12)
- College Housing (Multi-Residential Units)
- Mining Operations – Quarries, Mine Shafts
- Nautical Infrastructure – Cruise Ships, Marinas, Dive Operations, Submarines
- Video Surveillance/Security
- WiFi Deployment – ISP's, RV Parks, Construction Sites
- Manufacturing – Foundries, Pharmaceutical, Aerospace, Automotive, Petroleum, Concrete Plants, etc.
- Retail POS – Department stores, Bars, restaurants, retail spaces
- Government – Naval ships, FEMA, Housing, USGS, National Parks, Forestry, Research Stations, NASA, Utilities, etc.
- Education – Outdoor Camps, College & University Campuses
- Healthcare – Hospitals, Elder Care, Outpatient Facilities
- Entertainment – Movie theaters, Home Entertainment, Fairs, Outdoor Venues

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

INSTALLING THE 860 PRO ETHERNET EXTENDER KIT

The Enable-IT 860 Pro Ethernet Extenders have a distance restriction of 6,000ft (1,829m) over 1-pair of Category 2, up to 4-pair CAT5e / CAT7, wiring from device extension to device extension. Therefore quick, simple site surveys and installation planning are highly recommended.

This chapter describes the recommended installation process for the Enable-IT 860 Pro Ethernet Extender Kit. The following topics are covered:

- Site Plan – Installation Design Considerations
- Unpacking the Enable-IT 860 Pro Ethernet Extender Kit
- Perform an Out Of The Box Test (OOTBT)
- Performing the On-Site Installation

Site Plan – Installation Design Considerations

The planning process should involve a site walk-through and discovery survey. Electrical cable measurement tools are the most reliable method to determine the longest run of hidden wiring. Estimate the best locations to position the Broadband concentrators to adequately reach desired connectivity on each floor. Document your findings to use in designing a network topology to support the Ethernet switches and backbone connectivity. The following are key points to remember in the site survey:

- Total distance limitation of 6,000ft (1,829m) from end-to-end.
- 1-Pair CAT2 wiring, or 4-pair CAT5e, .30 gauge, or better, cabling is required for the 860 Pro Interlink transmission.

For the Interlink wiring you will need to use RJ-45 connectors. Crimp a RJ-45 Male head to each end of the contiguous wire run and use pins 1 & 2 straight through. This will deliver 1 voice line, and Ethernet data. If you desire to use the second voice line, you can also use pins 3 & 6 on each end straight through.

The 860 Pro Interlink port (RJ-45) carries this 1-pair signaling over the RJ-45 pins (1 & 2) - used as transport for both voice and data. If you use more than 1-pair of wiring, such as a CAT5 segment, the RJ-45 pins 3 & 4 are used for voice line 2, and the remaining pins (4,5,7 & 8) can transport native 802.3af PoE, or are unused. As an option, telephone dongles can be provided for use with existing RJ-11 wiring.

Optional Dongle:

RJ-45 Male Head:	Pins 1 & 2 – Voice line 1 and data
	Pins 3 & 6 – Voice line 2 and data
RJ-11 Sockets:	Pins 2 & 3 – VDLS2 & Phone port – Voice line 1 and data
	Pins 1 & 4 – Voice line 2

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

Unpacking The Enable-IT 860 Pro Ethernet Extender Kit

Carefully remove the Enable-IT 860 Pro Kit's packing materials from the box. Verify that the items listed below are present. Make sure that the equipment supplied matches what you ordered. If any items are missing or damaged, please contact Enable-IT or your distributor for assistance.

- (2) Enable-IT 860 Pro extended Ethernet units (CO & CPE)
  - 5v AC/DC Country Specific Power adapter
  - 10ft Ethernet LAN patch cables, Black
- (1) Enable-IT 860 Pro Ethernet Extender Kit Quickstart Guide

Perform An Out Of The Box Test (OOTBT)

We highly recommend that you perform a quick test to ensure the working order of your Enable-IT 860 Pro Ethernet Extender units prior to installing. To do this, please use one of the Ethernet patch cords provided and attach to the 860 Pro Interlink port of each 860 Pro unit. Power up both 860 Pro units using the provided 5v DC adapter. The Green Sync LEDs will start flickering slowly and then fast as the units talk to each other. After a few seconds you should see a solid Green Interlink Sync LED on each unit to confirm a link is established. This confirms basic proper operation of the units. Next for a more detailed test and to confirm your LAN Equipment works with the 860 Pro, connect your Ethernet LAN and remote device to the 860 Pro LAN ports and test connectivity. The Green Interlink Sync LED will pulse rapidly as it detects traffic.

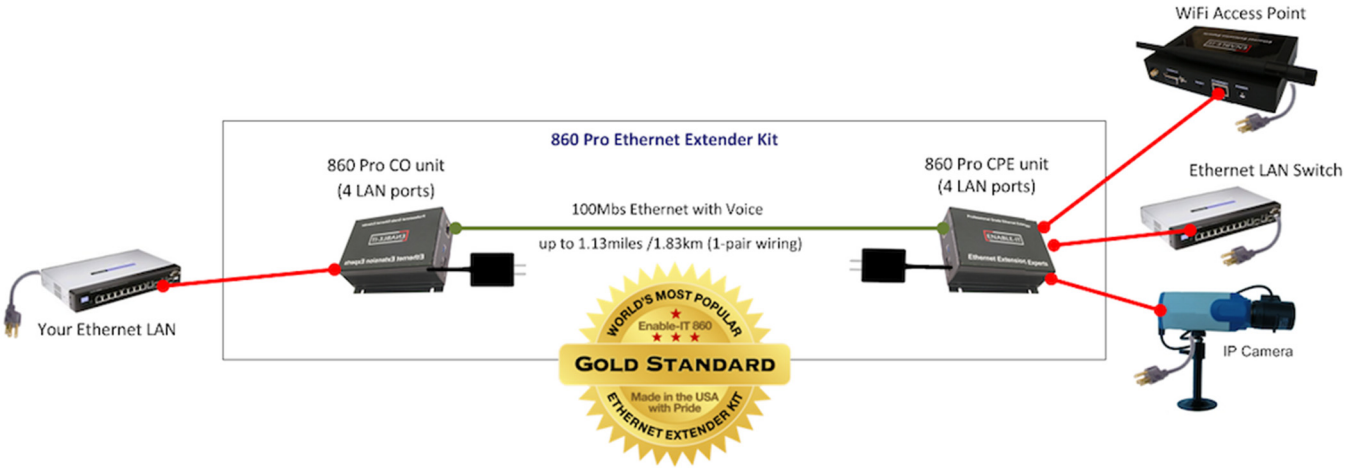

LED indicators will provide visual operational status of the 860 Pro units.

Mode – Yellow Solid LED
Off = CO unit
On = CPE unit

Sync – Green slow to fast flicker LED on power up – indicates negotiation of a link
– Green solid LED indicates link established and rapid pulse is traffic

Act – Yellow LED
Off = No device attached or detected
On = Solid, indicates the presence of local LAN
On = Blinking, indicates the presence of local LAN traffic

Pwr – Green Solid LED indicates the unit is receiving 5v power

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

Performing The On-Site Installation

After removing the Enable-IT 860 Pro Ethernet Extender Kit from the box, and performing the Out Of The Box Testing (OOTBT), all that remains to install the unit on-site is to mount the unit, build the interconnect wiring, add voice lines if needed, and attach the LAN device cabling with the provided Ethernet Patch cords.

❶ Mounting The Enable-IT 860 Pro Ethernet Extender Units
The Enable-IT 860 Pro extended Ethernet solution is designed for quick wall mounting. Choose a location to mount each of the Enable-IT 860 Pro's where the maximum distance does not exceed 6,000ft (1,829m) total between devices to be connected. When wall-mounting the Enable-IT 860 Pro unit it is recommended that you use the appropriate screw anchors for your mounting surface. If mounting on existing plywood use wood screws; if mounting onto drywall or sheetrock, use plastic drywall anchors to secure your installation.

❷ Building The 860 Pro Interlink Wiring
The most important aspect of the installation is the correct wiring of the Interlink cabling.

The 860 Pro Interlink port (RJ-45 interface) carries this 1-pair signaling over the RJ-45 (pins 1 & 2) - used as transport for both voice and data. If you use more than 1-pair of wiring, such as a CAT5 segment, the RJ-45 (pins 3 & 4) are used for voice line 2, and the remaining pins (4,5,7 & 8) can transport native 802.3af PoE, or are unused.

For all wiring you will need to crimp a RJ-45 Male head to each end of the contiguous wire run and using the following (pins 1 & 2) straight through. This will deliver 1 voice line, and Ethernet data. If you desire to use the second voice line, you will need to request our optional dongle that will allow for connecting telephone lines to this interlink wiring. Insert the completed RJ-45 ends into the 860 Pro Interlink port on each 860 Pro unit.

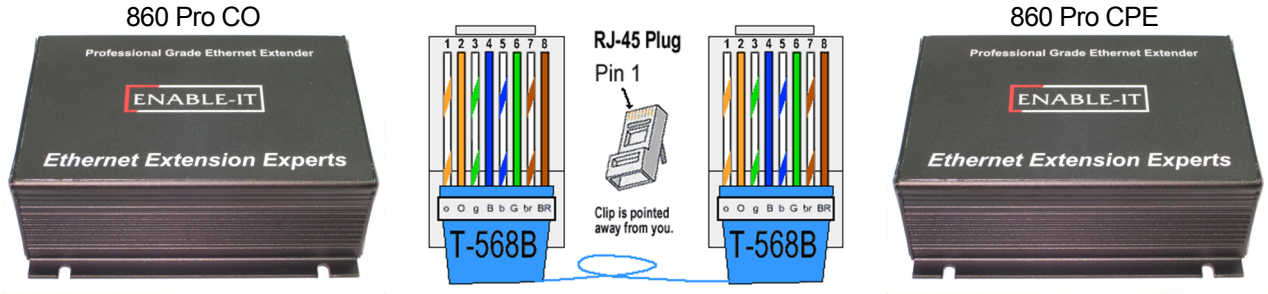

❸ Cabling Devices To The Enable-IT 860 Pro Extended Ethernet Kit
Attach your remote LAN device to the 860 Pro CPE unit LAN ports with Ethernet patch cord provided. Attach your local LAN to the 860 Pro CO LAN ports with Ethernet patch cord provided. Attach the power adapters to both 860 Pro units.

Attach your local Interlink cabling end to the 860 Pro CO unit Interlink port – Then do the same for the remote end and plug into the 860 Pro CPE unit Interlink port. The Sync LED's will flicker in a sequence talking to each other until they go solid. Your equipment should now be powered up and functioning.

LED indicators will provide visual operational status of the 860 Pro units.

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

Mode – Yellow Solid LED
Off = CO unit
On = CPE unit
Sync – Green slow to fast flicker LED on power up – indicates negotiation of a link
– Green solid LED indicates link established and rapid pulse is traffic
Act – Yellow LED
Off = No device attached or detected
On = Solid, indicates the presence of local LAN
On = Blinking, indicates the presence of local LAN traffic
Pwr – Green Solid LED indicates the unit is receiving 5v power

❹ Troubleshooting

First examine the backbone wiring pair and make sure you have solid connections. The Interlink Sync LED will be lit solid Green with rapid pulsing on each 860 Pro unit to show proper connection and pairing. If the Interlink Sync LED Link is flashing slow to fast and never goes solid…. Then follow the steps below:

1) Make sure your wiring is straight through and not connected to any Telco punch down blocks; If so remove from the block and use Telco butt clips to bridge wire.
2) Check for a firm connection of the RJ-45 connections in each 860 Pro unit, and power is applied to the 860 Pro CO & CPE units.
3) **You can easily isolate any issue by performing an <u>Out Of The Box Test (OOTBT)</u>. This test will confirm the correct working order of your Enable-IT 860 Pro Ethernet Extender Kit. This will point to a possible issue with your long distance Interlink wiring being affected by possible outside interference.**

Performance Settings (DIP Switch)



If you are experiencing performance issues with your Ethernet connection you may use the following DIP switch settings to adjust your application. For DIP switch 2-4 you must toggle both symmetrically, in other words the CO and CPE must match. If you turn DIP switch 3 Up (Off) on the CO, then you must do so for the CPE and vice-versa.

- Switch 1: CO / CPE Mode
  CO Mode – Up / Off Position
  CPE Mode – Down / On Position
  Central Office Equipment (CO) is generally the equipment residing at the Carrier Telephone office or the head end of a circuit. Customer Premise Equipment (CPE) is generally the equipment residing on the customer side of a circuit. Typically you would place the CO at the local end and the CPE at the remote end for reference only. CO's only communicate with CPE's.

- Switch 2: Error Correction Mode
  Interleaved Error Correction Enabled – Up / Off Position – degrades performance
  Fast Channel – Down / On Position (Default)
  Interleaved Error Correction works better for file transfers, where the delivered data must be error free but latency incurred by the retransmission of error packets is acceptable. Fast channel is preferred for streaming multimedia, where an occasional dropped bit is not noticeable or acceptable.

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

- Switch 3: 17a (over 1,500ft) / 30a (under 1,500ft) Mode
  17a Mode – Up / Off Position
  30a Mode – Down / On Position (Default)
  17a mode is only used for Interlink runs over 1,500ft to 6,000ft.
  30a mode is only enabled for Interlink runs under 1,500ft.

- Switch 4: Signal-to-noise Noise Ratio (SNR)
  9dB – Up / Off Position
  6dB – Down / On Position (Default)
  Signal-to-noise ratio is a measurement that refers to how much noise is in the output of a device, in relation to the signal level. If you experience issues of noise bleeding over the lines, or high interference in your environment, it is suggested that you switch to 6dB SNR. This may help clean up any noise bleeding over your cabling.

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

TECHNICAL SUPPORT

Enable-IT, Inc.'s Customer Care Team support is available directly to customers and distributors. All support requests are processed through the online support portal. This allows us to provide assigned support ticket numbers in order to bring closure to any technical issues.

Online Technical Services

The Enable-IT Support Portal is available 24/7 to open a ticket or check the status of one. Please use this support website as your first source for help as it contains an on-line knowledge base of articles, documentation, FAQ's and other problem-solving resources. This web-based support resource provides the quickest solution to the most common technical support issues.

World Wide Web Site

http://support.enableit.com

Returning Products for Warranty Repair

Enable-IT, Inc. warrants to the original purchaser of the Product ("you" or the "End User") that, for the four (4) year period commencing on the date the Product was purchased (the "Warranty Period"), the Product will be substantially free from defects in materials and workmanship under normal use and conditions. **Electrical damage is not an item that is covered under this warranty, extended warranties or Advanced Replacement Program (AREP).**

In order to obtain an authorized RMA approval, the End User must complete the required information online located at http://support.enableit.com. If you have questions or difficulty completing this information you may contact the Customer Care Team at 888-309-0910 between the hours of 8:00 a.m. and 5:00 p.m. PT.

Please ship Authorized RMAs to:

Enable-IT Processing Facility
16600 Harbor Blvd, Suite I
Fountain Valley, CA 92708-1363

Returning Products for Refund

Enable-IT, Inc. offers a generous 45-Day refund on a single Ethernet Extender Kit only, and is subject to a 15% Restocking Fee. Shipments without a valid or authorized RMA number, or sent to our corporate Las Vegas address, can be refused and / or billed for additional shipping.

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

ENABLE-IT, INC. LIMITED WARRANTY

Enable-IT, Inc. warrants the Enable-IT 860 Pro Ethernet Extender Kit solely pursuant to the following terms and conditions.

1. PRODUCT WARRANTY.

a. Express Warranty.

Enable-IT warrants to the original purchaser of the Product ("you" or the "End User") that, for the four (4) year period commencing on the date the Product was purchased (the "Warranty Period"), the Product will be substantially free from defects in materials and workmanship under normal use and conditions. This warranty does not apply to Products, which are resold as used, repaired or reconditioned, or consumables (such as batteries) supplied with the Product. **Electrical damage is not an item that is covered under this warranty or extended warranties.** Enable-IT does not make any warranty with respect to any third party product, software or accessory supplied with or used in connection with the Product and such third party products, software and accessories, if any, are provided "AS IS." Warranty claims related to such third party products, software and accessories must be made to the applicable third party manufacturer.

b. Remedies for Breach of Warranty.

In the event of a breach of the foregoing warranty, Enable-IT will, in its sole discretion and at its cost, and subject to the terms of the following paragraph, repair the non-conforming Product, replace the non-conforming Product with a new or reconditioned Product or refund the purchase price for the Product. Any new or reconditioned Product provided pursuant to this paragraph is warranted as provided herein for the remainder of the original Warranty Period. THE REMEDY SET FORTH IN THIS PARAGRAPH SHALL BE THE END USER'S SOLE AND EXCLUSIVE REMEDY FOR BREACH OF THE FOREGOING WARRANTY.

c. Conditions for Warranty Qualification.

If authorized by Enable-IT to return a Product which does not conform to the warranty set forth above, the End User must: (1) obtain a return materials authorization (RMA) number from Enable-IT by contacting the Customer Service Dept. at 888-309-0910 between the hours of 8:00 a.m. and 5:00 p.m. PST and otherwise fully comply with Enable-IT's then-current RMA policy; (2) return the Product to Enable-IT in its original packaging freight pre-paid; and (3) provide to Enable-IT the original receipt or bill of sale establishing the date on which the Product was purchased. Products returned to Enable-IT without an RMA number will be returned to the End User. Enable-IT shall not be responsible for damage or loss during shipment of the returned Product to Enable-IT.

d. Voiding of Warranty.

The express warranty set forth above shall not apply to failure of the Product if the Product has been subjected to: (i) physical abuse, misuse, improper installation, abnormal use, power failure or surge, or use not consistent with the operating instructions provided by Enable-IT; (ii) modification (including but not limited to opening the Product housing) or repair by any party in any manner other than as approved by Enable-IT in writing; (iii) fraud, tampering, unusual physical or electrical stress, unsuitable operating or physical conditions, negligence or accidents; (iv) removal or alteration of the Product serial number tag; (v) improper packaging of Product returns; or (vi) damage during shipment (other than during the original shipment of the Product to the End User from Enable-IT, if applicable).

e. Warranty Disclaimers.

THE EXPRESS WARRANTY SET FORTH ABOVE IS IN LIEU OF ALL OTHER WARRANTIES, WHETHER WRITTEN, ORAL, EXPRESS OR IMPLIED. ENABLE-IT

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

DISCLAIMS, TO THE MAXIMUM EXTENT PERMITTED BY LAW, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT OF THIRD PARTY RIGHTS. NO PERSON (INCLUDING WITHOUT LIMITATION, ENABLE-IT'S EMPLOYEES, AGENTS, RESELLERS, OEMS OR DISTRIBUTORS) IS AUTHORIZED TO MAKE ANY OTHER WARRANTY OR REPRESENTATION CONCERNING THE PRODUCT. IF THE DISCLAIMER OF ANY IMPLIED WARRANTY IS NOT PERMITTED BY LAW, THE DURATION OF ANY SUCH IMPLIED WARRANTY IS LIMITED TO ONE (1) YEAR FROM THE DATE OF PURCHASE. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES OR LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY MAY LAST, SO SUCH LIMITATIONS OR EXCLUSIONS MAY NOT APPLY. THIS WARRANTY GIVES THE END USER SPECIFIC LEGAL RIGHTS AND THE END USER MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM JURISDICTION TO JURISDICTION. ENABLE-IT DOES NOT WARRANT THAT THE OPERATION OF THE PRODUCT WILL BE UNINTERRUPTED OR ERROR FREE. ENABLE-IT IS NOT RESPONSIBLE FOR ANY DAMAGE TO OR LOSS OF ANY PROGRAMS, DATA, OR OTHER INFORMATION STORED ON OR TRANSMITTED USING THE PRODUCT.

2. **LIMITATION OF LIABILITY.**
IN NO EVENT SHALL ENABLE-IT BE LIABLE TO THE END USER, OR ANY THIRD PARTY, FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING OUT OF THE SALE OR USE OF THE PRODUCT (INCLUDING BUT NOT LIMITED TO LOSS OF PROFIT, USE, DATA, OR OTHER ECONOMIC ADVANTAGE), HOWEVER IT ARISES, INCLUDING WITHOUT LIMITATION BREACH OF WARRANTY, OR IN CONTRACT OR IN TORT (INCLUDING NEGLIGENCE), OR STRICT LIABILITY, EVEN IF ENABLE-IT HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND EVEN IF A LIMITED REMEDY SET FORTH IN THIS AGREEMENT FAILS OF ITS ESSENTIAL PURPOSE. IN NO EVENT SHALL ENABLE-IT'S LIABILITY TO THE END USER, OR ANY THIRD PARTY, EXCEED THE PRICE PAID FOR THE PRODUCT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATIONS MAY NOT APPLY TO THE END USER.

3. **LICENSE AND LIMITATIONS.**
The firmware and software embedded in the Product (the "Embedded Software") are licensed to you. Your use of the Product is your acceptance of the warranty terms above and the terms below. You may use the Embedded Software solely in conjunction with your use of the Product. All worldwide right, title and interest in and to the Product, or any portion thereof (including but not limited to the Embedded Software), including all copyrights, patent rights, trademarks, trade secrets, and other intellectual property rights therein and thereto, are and shall remain the exclusive property of Enable-IT and/or its licensors. You acknowledge and agree that you may not, and may not allow any third party to, (i) use the Embedded Software in a manner that is inconsistent with the above express right granted to you or (ii) modify, distribute, reproduce, decompile, disassemble, reverse engineer or otherwise attempt to discover the source code for the Embedded Software.

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.

CONTACT US

Sales and Customer Care:

Toll Free US and Canada	888 309-0910 866 389-8605 Fax
Other International	+1 702 924-0402 +1 702 800-2711 Fax
E Mail	sales@enableit.com support@enableit.com

RMA Support:

http://support.enableit.com

All Rights Reserved ©1997 - 2013 Enable-IT, Inc.